

BONESCHI ARMOURER AMBULANCE


ARMoured AMBULANCE INTERNATIONAL RED CROSS



M 40.13 WM/P



ARMoured AMBULANCE
INTERNATIONAL RED CROSS



M 40.13 WM/P



ARMoured ABulance INTERNATIONAL RED CROSS



M 40.13 WM/P

Dimensions (mm ; $\pm 3\%$ tolerance)


Wheelbase	2800
Front track	1670
Rear track	1670
Front overhang	1050
Rear overhang	900
Overall length	5050
Overall width	2100
Overall height	2300
Approach angle (degr.)	40
Departure angle (degr.)	40
Ground clearance (rear axle)	266

Weights (kg ; $\pm 3\%$ tolerance)


G.V.W. max allowed
Front axle rating
Rear axle rating
Curb (with spare wheel, 75Kg driver)
Front
Rear
Payload
Towability

Performance

Gradeability	over 60%
Side slope	over 30%
Fording depth	0.7 m
Turning radius (wb. 2800 mm)	6 m
Top speed	over 100 Km/h

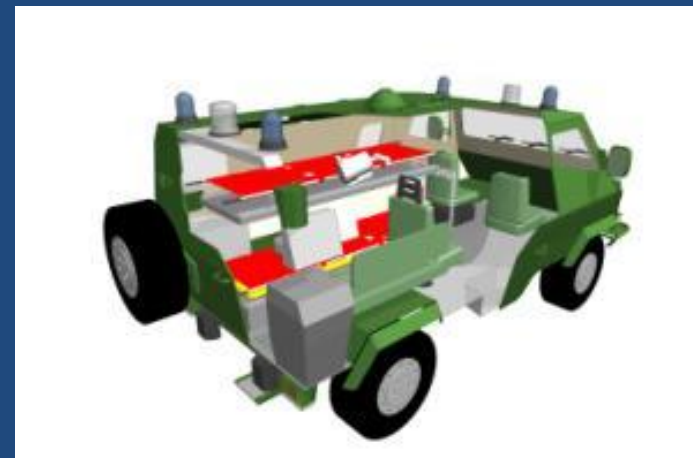

MEDICAL DEVICES



The ambulance can be equipped with many medical devices such as:

- ✓ primary and secondary stretcher;
- ✓ scoop stretcher
- ✓ spinal stretcher
- ✓ certified Oxygen system;
- ✓ collars and similar devices;
- ✓ fixed and portable suction Unit;
- ✓ ked
- ✓ vacuum mattress
- ✓ vacuum splints
- ✓ aneroid wall sphygmomanometer
- ✓ pulsoximeter and other rescue and emergency devices



SAVIO

BONESCHI

allestito con cmc